



2000 SERIES


FOR USE IN: Shopping precincts, walkways, pedestrianised zones, parks, pedestrian refuges and residential schemes

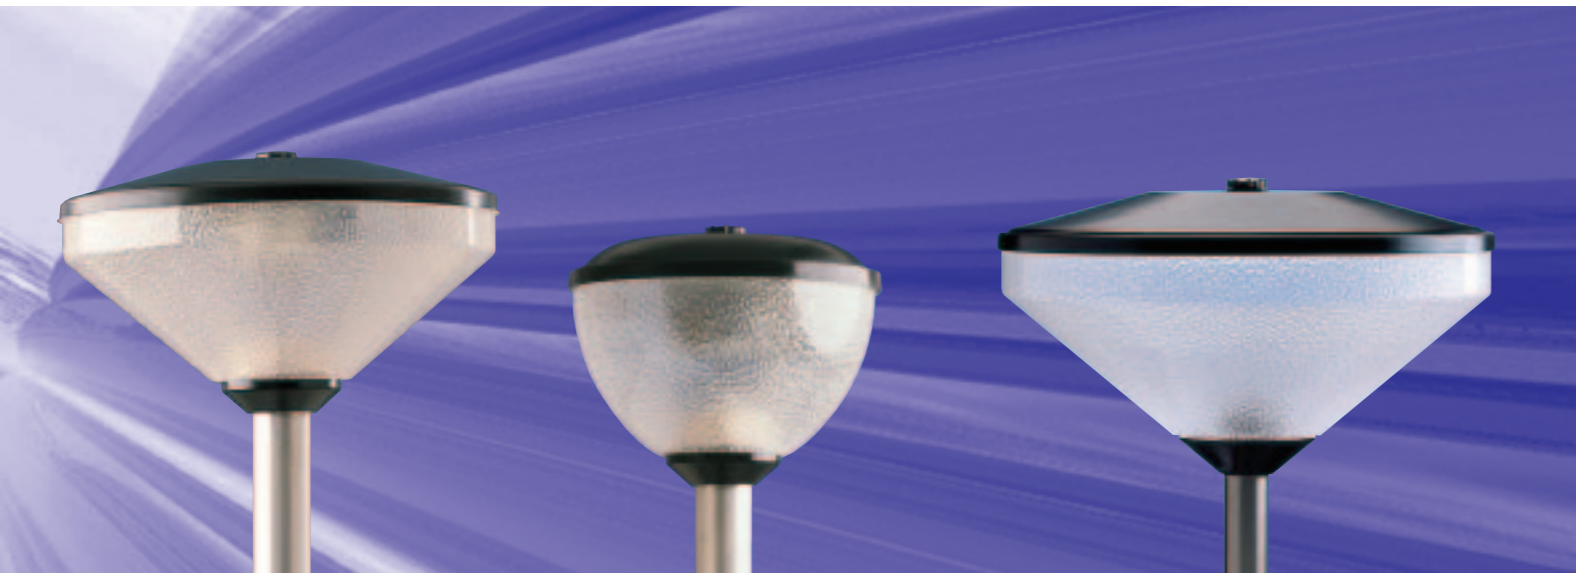


Dimensions and Weights




2000

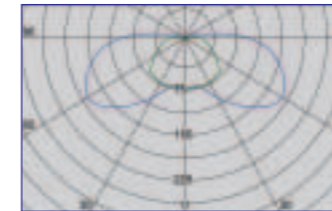


Typical Polar Curve of 2000




2015

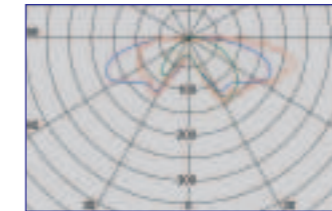

Typical Polar Curve of 2015

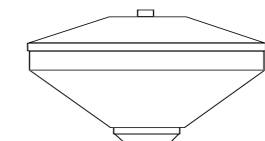

2050

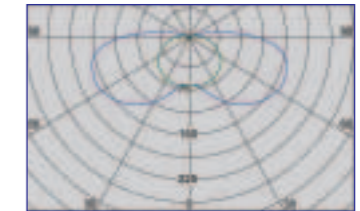

Typical Polar Curve of 2050

Type	Diameter mm	Height mm	Weight kg
2000	570	340	5.0
2015	410	340	4.5
2050	680	400	8.0

Key Features and Benefits

- **Robust and vandal resistant** The very high strength monocoque construction delivers the optimum vandal-resistant post top lantern – rated IK08
- **Widely used** The 2000 Series has been specified for many years across Europe – 100,000 plus in service
- **Robust, stylish bowl** The very robust polycarbonate bowl has a stylish ice structure finish and is rated IK08
- **IP66** Excellent weather protection with ingress protection is assured
- **Versatile light distribution** The high quality light technical performance enables symmetrical or asymmetrical distribution
- **Body:** GRP
- **Bowl:** UV stabilised, injection moulded polycarbonate, ice structure, white or bronzed
- **Finish:** Black
- **Mounting:** Post top, 76mm
- **Optical system:** Integral to the gear tray for ease of maintenance
- **Control gear:** Integral as standard
- **Insulation:** Class 1 (must be earthed)
- **Ambient temperature range:** -20°C to + 25°C
- **Standard ballast:** 230/240V thermally protected (SON-T only)

Standard Lantern Offer Order Codes

Lamp	Distribution	Type 2000	Type 2015	Type 2050
1 x 18W CFL-L	SYMMETRIC	2000S18F	2015S18F	2050S18F
2 x 18W CFL-L	SYMMETRIC			2050S2/18F
2 x 18W T8	SYMMETRIC			2050S2/18FT8
1 x 24W CFL-L	SYMMETRIC	2000S24F	2015S24F	2050S24F
2 x 24W CFL-L	SYMMETRIC	2000S2/24F	2015S2/24F	2050S2/24F
1 x 36W CFL-L	SYMMETRIC	2000S36F		2050S36F
2 x 36W CFL-L	SYMMETRIC	2000S2/36F		2050S2/36F
55W CFL-L	SYMMETRIC			2050S55F
26W SOX-E/35W SOX	SYMMETRIC	2000S26/35	2015S26/35	2050S26/35
50W SON-T	SYMMETRIC	2000S50	2015S50	2050S50
50W SON-T	ASYMMETRIC	2000A50	2015A50	2050A50
70W SON-T	SYMMETRIC	2000S70	2015S70	2050S70
70W SON-T	ASYMMETRIC	2000A70	2015A70	2050A70
100W SON-PT	SYMMETRIC	2000S100	2015S100	2050S100
100W SON-PT	ASYMMETRIC	2000A100	2015A100	2050A100
150W SON-PT	SYMMETRIC			2050S150
150W SON-PT	ASYMMETRIC			2050A150

To specify state: Tough post top lantern rated IK08 with ice structure polycarbonate bowl in symmetrical and asymmetrical distributions as WRTL 2000 Series.



WRTL Exterior Lighting Ltd. Waterside Park, Golds Hill Way, Tipton, West Midlands DY4 0PU, UK.
Tel: +44 (0)121 521 1234 Web: www.wrtil.co.uk