

Precinct^{1:1}

70W HPS-E E27	80W MBF E27	IP23 EN 60598			
---------------	-------------	---------------	--	--	--

A performance luminaire for pedestrian walkways and amenity areas.

- Wall or post-top mounting (76mm Ø spigot)
- Vandal-resistant bowl - hinged for easy maintenance

Materials/Finish


Canopy: Pressure die-cast LM6 aluminium finished black powder coat.
 Bowl: Opal vandal-resistant plastic.
 Column adaptor: Pressure die-cast aluminium finished black powder coat.

Installation/Mounting


Direct wall mounting, or post top column adaptor for 76mm Ø spigot.
 Recommended height 2.5-5m.
 See column sections for lantern compatibility.
 Bowl is hinged to body with captive retaining screw.

Specification

To specify state: Exterior lantern with cast LM6 aluminium body and vandal-resistant opal bowl, with control gear for low wattage discharge lamps. As Thorn Precinct.




Post top mounted




Fixing holes shown dotted 5.5ø

Wall

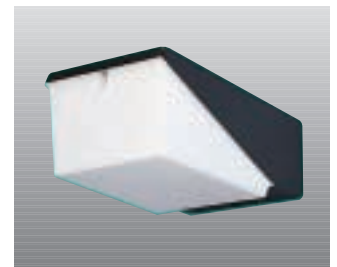

Wall mounted

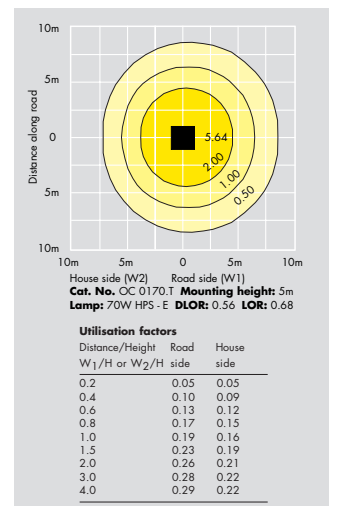

Ordering Guide

Lamp type & rating	Windage	Weight (m ²)	Cat. No. (kg)
HPS-E 70W	0.046	4.9	OC 1070.T
MBF 80W	0.046	4.1	OC 1080.T
Column adaptor for 1 or 2 lanterns	-	-	OCA1/2

Export voltages available, refer to page 553 for details.